





Kcal = Watt x 0.860
BTU = Watt x 3.413

Watt Δt 60° = Watt Δt 50° x 1.251
Watt Δt 40° = Watt Δt 50° x 0.760
Watt Δt 30° = Watt Δt 50° x 0.534
Watt Δt 20° = Watt Δt 50° x 0.325

p max = 6.5 bar

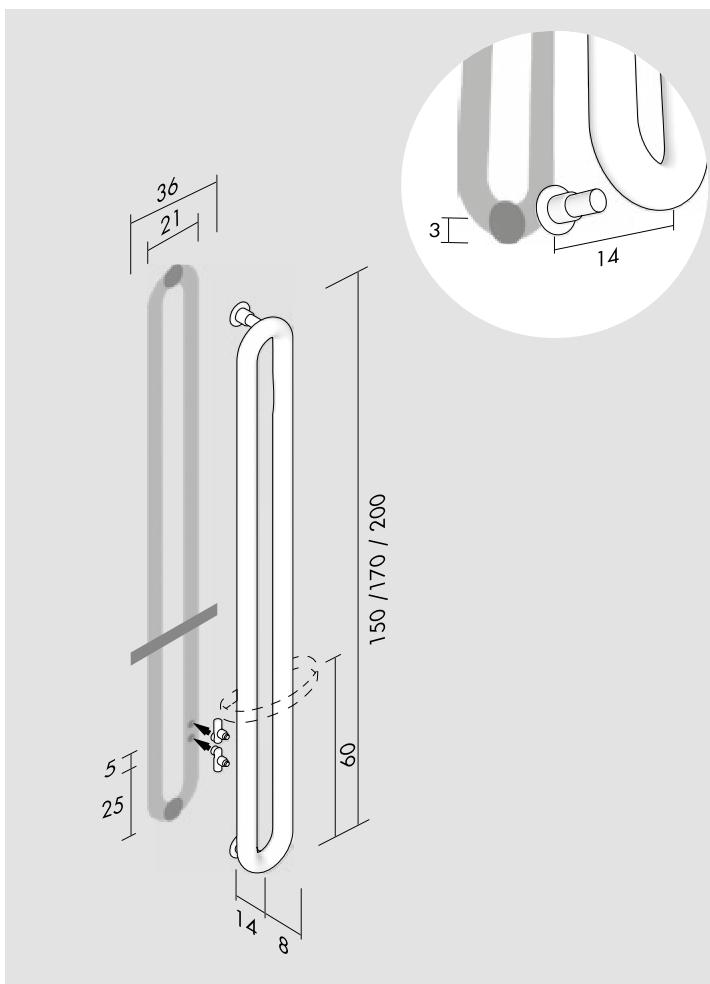

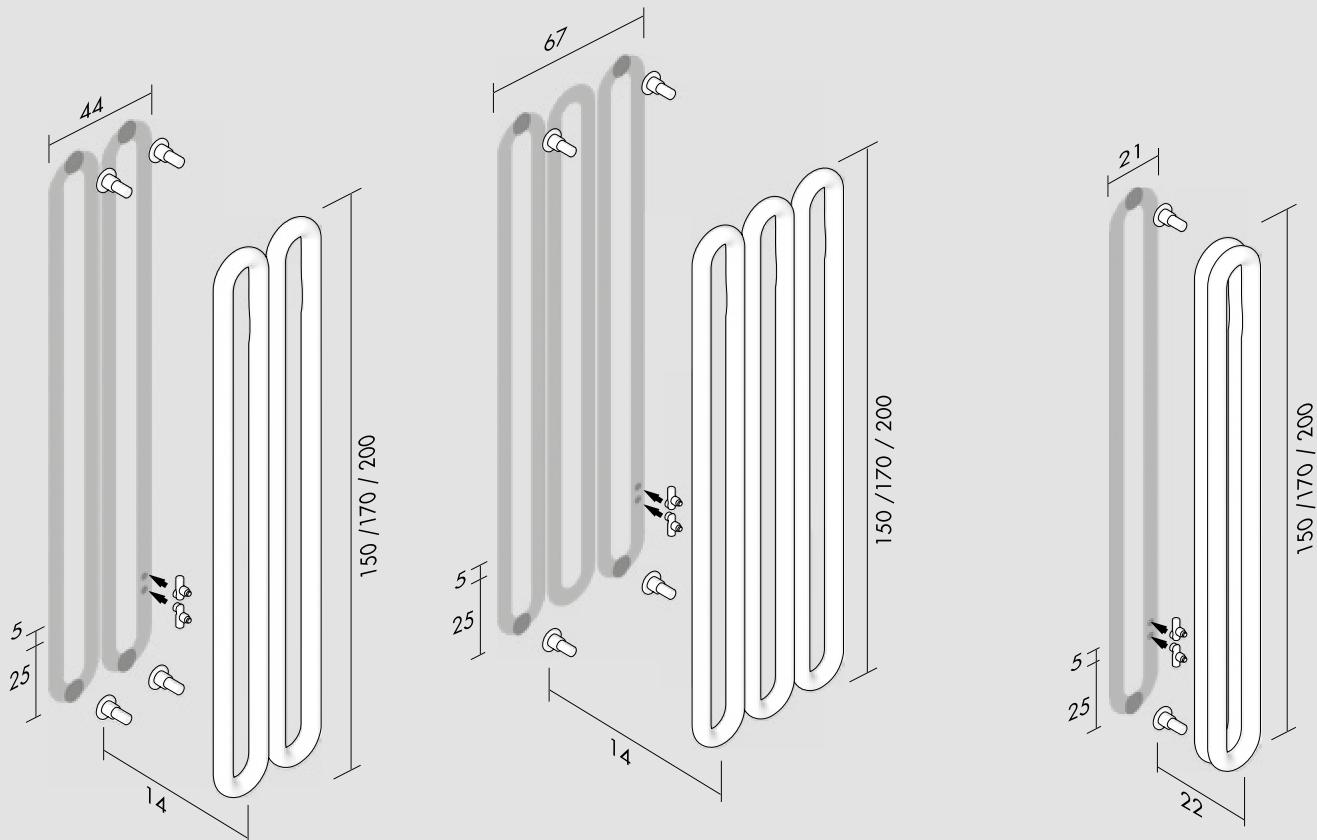**Tubone V**

H cm	L cm	I* cm	art*	lt*	watt Δt 30°	watt Δt 50°
150.0	21.0	5.0	TNVS150001_	7.0	173	324
150.0	44.0	5.0	TNVS150002_	14.0	346	648
150.0	67.0	5.0	TNVS150003_	21.0	519	972
170.0	21.0	5.0	TNVS170001_	7.9	196	367
170.0	44.0	5.0	TNVS170002_	15.9	392	734
170.0	67.0	5.0	TNVS170003_	23.8	588	1 101
200.0	21.0	5.0	TNVS200001_	9.3	231	432
200.0	44.0	5.0	TNVS200002_	18.7	461	864
200.0	67.0	5.0	TNVS200003_	28.0	692	1 296

Vertical overlapped / Verticale superposé / Übereinander stehen / Vertical sobrepuesto

H cm	L cm	I* cm	art*	lt*	watt Δt 30°	watt Δt 50°
150.0	21.0	5.0	TNVD150001_	14.0	262	491
170.0	21.0	5.0	TNVD170001_	15.9	302	565
200.0	21.0	5.0	TNVD200001_	18.7	350	655

Standard


(P* = 203)
 "S" Valve
 Vanne "S"
 "S" Ventil
 Válvula "S"

[BIAN] X38SB
 [CROM] X38SR

Optional


Thermostatic head
 Tête thermostatique
 Thermostatikkopf
 Cabezal termostático

[BIAN] TTB
 [CROM] TTR

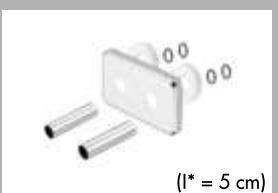

Sleeving kit
 Kit couvre tuyau
 Rosetten
 Kit cubre tubo

[BIAN] C5B
 [CROM] C5R

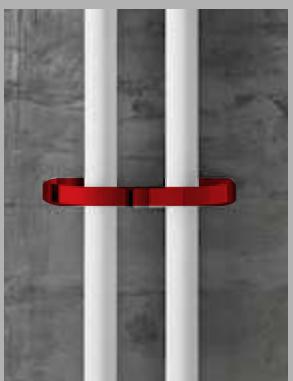

Towel bar
 Porte-serviettes
 Handtuchhalter
 Porta toallas

[CROM] STBR
 [COLOUR] STBC
 [GOLD] STBG

art* = item / modèle / Artikel / artículo I* = pipe centres / distance entre départ et retour / Achsabstand / distancia entre las conexiones
 Lt* = water content for each element / volume d'eau pour chaque élément / Wassergehalt für Element / contenido de agua por cada elemento
 P* = page / page / Seite / página