




Kcal = Watt x 0.860  
BTU = Watt x 3.413


Watt Δt 60° = Watt Δt 50° x 1.241  
Watt Δt 40° = Watt Δt 50° x 0.768  
Watt Δt 30° = Watt Δt 50° x 0.546  
Watt Δt 20° = Watt Δt 50° x 0.338

p max = 10.0 bar

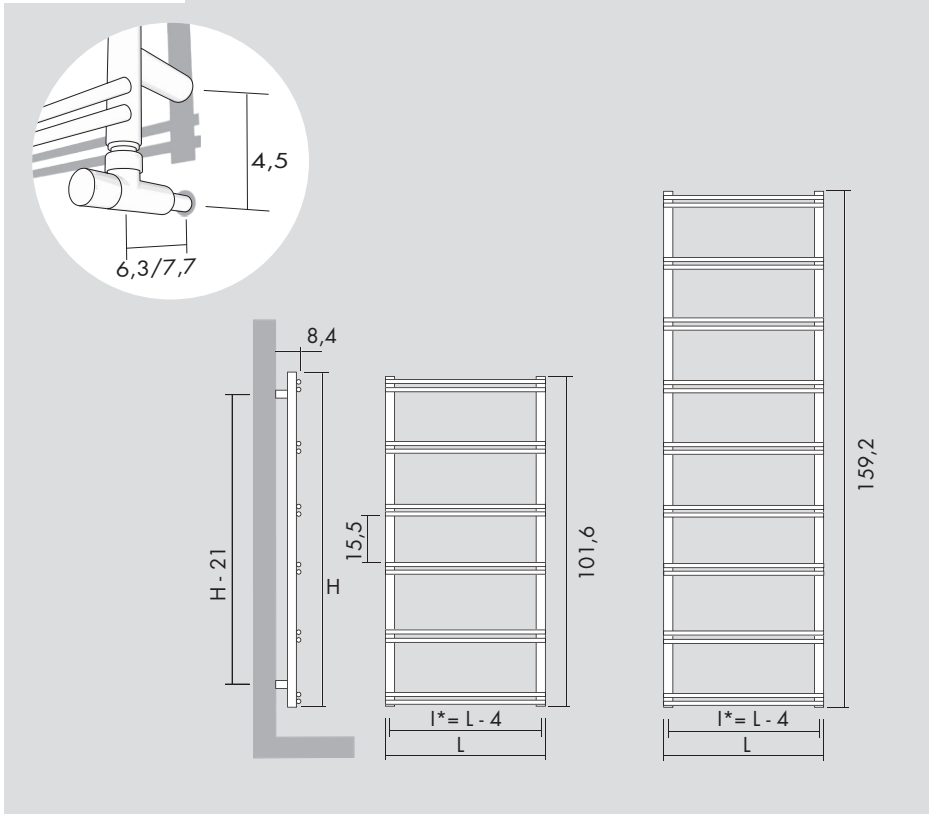


H cm	L cm	I* cm	art*	Lt*	watt Δt 30°	watt Δt 50°
101.6	40.0	36.0	<b>PV13V040100</b>	2.2	132	<b>242</b>
101.6	50.0	46.0	<b>PV13V050100</b>	4.1	165	<b>303</b>
159.2	40.0	36.0	<b>PV13V040160</b>	5.7	199	<b>364</b>
159.2	50.0	46.0	<b>PV13V050160</b>	5.9	248	<b>455</b>

Standard connection / Raccord standard  
Standard Anschluss / Conexión estándar

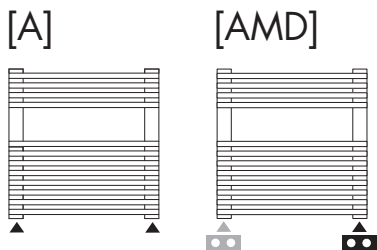

Special connection / Raccord spéciale / Speziell Anschluss / Conexión especial

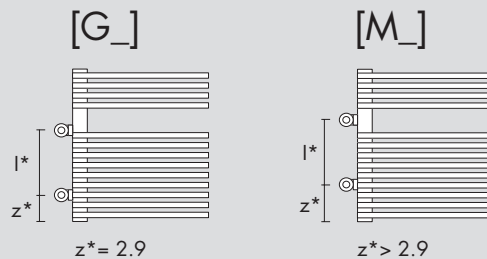

Replace \_ with connection S (Left) or D (Right). / Remplacer le \_ avec raccordement S (Gauche) ou D (Droite). / Um linker oder rechter Anschluss zu bestellen, bitte das Symbol \_ mit S (links) oder D (rechts) ersetzen. / Sustituir el \_ con las conexiones S (Izquierda) o D (Derecha).

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento


Dual application with schuko plug / Version mixte avec prise schuko /  
Kombimodell mit Schukosteckdose / Versión mixta con enchufe schuko

H cm	L cm	I* cm	art*	Lt*	watt	Δt 30°	watt	Δt 50°	watt
101.6	40.0	29.5	<b>MC PV13V040100</b>	2.2	132	<b>242</b>	200		
101.6	50.0	39.5	<b>MC PV13V050100</b>	4.1	165	<b>303</b>	250		
159.2	40.0	29.5	<b>MC PV13V040160</b>	5.7	199	<b>364</b>	350		
159.2	50.0	39.5	<b>MC PV13V050160</b>	5.9	248	<b>455</b>	400		

Standard



Heating element  
Résistance  
Heizstab  
Resistencia

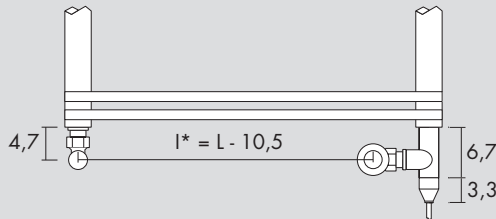

Optional



Receiver  
Récepteur  
Empfänger  
Receptor

**R10**



Digital chronothermostat  
Chronothermostat digital  
Der digital Chronothermostat  
Cronotermostato digital

**T11**

Dual electric element with thermostat / Mixte résistance avec thermostat /  
Kombimodell mit Raumthermostat / Versión mixta con termostato ambiente

H cm	L cm	I* cm	art*	Lt*	watt	Δt 30°	watt	Δt 50°	watt
101.6	40.0	29.5	<b>MT PV13V040100</b>	2.2	132	<b>242</b>	200		
101.6	50.0	39.5	<b>MT PV13V050100</b>	4.1	165	<b>303</b>	250		
159.2	40.0	29.5	<b>MT PV13V040160</b>	5.7	199	<b>364</b>	350		
159.2	50.0	39.5	<b>MT PV13V050160</b>	5.9	248	<b>455</b>	400		

Standard




Thermostat  
Thermostat  
Der Thermostat  
Termostato



Infrared remote control  
Télécommande infrarouge  
Infrarot-Fernbedienung  
Mando por infrarrojos

[BIAN]  
[CROM]

ECODESIGN

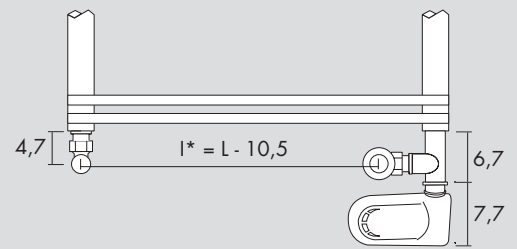

Optional




Angled Valve  
Vanne équerre  
Eckausführung Ventil  
Válvula a escuadra

[BIAN] **E12SQB**  
[CROM] **E12SQR**



Thermostatic head  
Tête thermostatique  
Thermostatkopf  
Cabezal termostático

[BIAN] **TTB**  
[CROM] **TTR**



Ø ≤ 16 mm  
[BIAN] **CTB**  
[CROM] **CTR**

16 mm < Ø < 24 mm  
[BIAN] **CWB**  
[CROM] **CWR**



2 pz.

Towel hooks  
Paire de patère  
Crochet das Bugel  
Percha  
[CROM] **BA25R**  
[COLOUR] **BA25C**  
[GOLD] **BA25G**

art\* = item / modèle / Artikel / artículo    I\* = pipe centres / distance entre depart et retour / Achsabstand / distancia entre las conexiones  
Lt\* = water content for each element / volume d'eau pour chaque element / Wassergehalt für Element / contenido de agua por cada elemento