

Vorpa KP

Nylon clip for pipes and cables

products group



KP
nylon clip

Suitable for
• nylon plug Ø6


To fix
• metric insulation pipes
• cable

product information


Characteristics

- plastic clip with an upper part suitable for pipes saddle, can be installed with a light-weight anchor
- made of polypropylene colour Grey RAL 7035
- flammability rating: UL 94-HB
- a side hook for connecting other pipe saddles in series
- cables: Ø mini 8 - Ø maxi 60
- raw Material: Polyamid 6
- burning properties: according to IEC 60695-2-12 (GWFI): 650°C
- colour: Grey, RAL 7035
- installation temperature: -5°C / +40°C
- working temperature: -30°C / +65°C

installation sequence e technical data

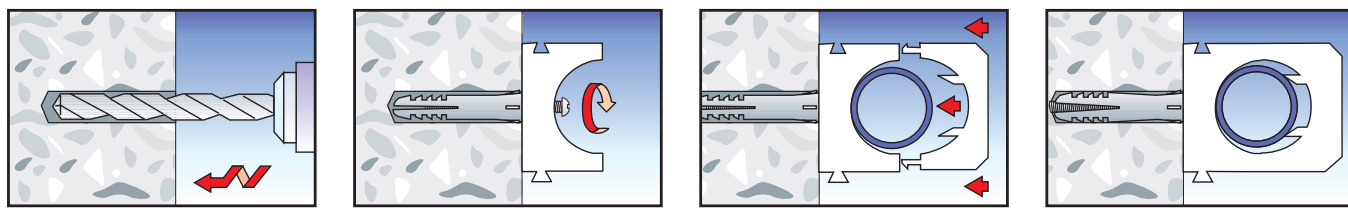

Clean the hole before the installation

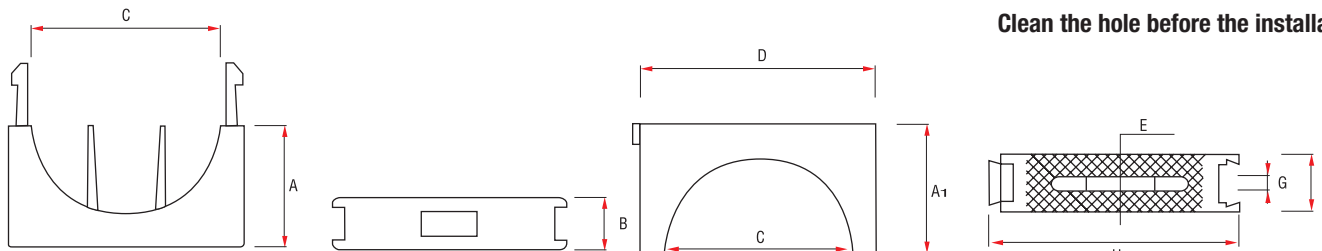

Code	Description	Ø mim mm	Ø max mm	Resistance of the top part opening daN	KP	8	10	16	20	25	32	40	50
1190	KP 8	4	8	10	A (mm)	8,05	10,6	14,25	16,3	18,2	23,8	27,8	35,2
1191	KP 10	8	12	10	A1 (mm)	9,7	11,8	15,3	17,45	19,7	25,15	28,8	37
1192	KP 16	12	16	23	B (mm)	16,85	16,8	16,25	15,75	15,9	15,6	15,45	15,45
1193	KP 20	16	23	20	C (mm)	11,75	12	18,6	22,45	25,3	34,6	44,15	57,3
1194	KP 25	20	25	25	D (mm)	16,7	21,8	26,75	31	34,7	45,6	55,1	69,35
1195	KP 32	25	32	31	E (mm)	4,9	4,9	4,9	4	4,85	4,8	4,85	4,9
1196	KP 40	32	40	40	F (mm)	17,2	17,2	16,9	16,65	17	17	16,95	17,15
1197	KP 50	40	60	50	G (mm)	4	4	3,9	3,9	3,85	4	4,1	4,1
					H (mm)	18,95	24,05	29,2	33,4	37,2	47,85	57,35	71,6

Examples of applications

