
cladding and pipe fixings

Vorpa **TC**

Nylon clip with plug and screw



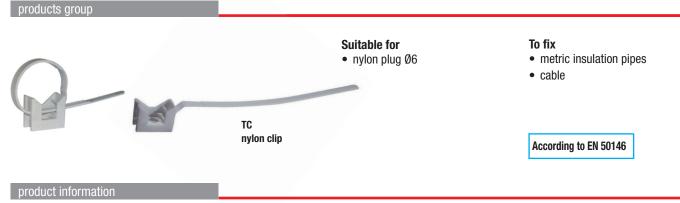

Characteristics

- nylon cable tie for plastic and metal pipe
- cables: Ø min 16 Ø maxi 63
- raw Material: Polyammide
- burning properties: according to IEC 60695-2-12 (GWFI): 650°C
- colour: Grey, RAL 7035
- installation temperature: -5°C/+35°C
- working temperature: -40°C/+70°C


installation sequence

• flammability rating: UL 94-HB

- plastic cable for fixing or protecting rigid, metric insulating pipes in electrical installations, on vertical or horizontal surfaces (from Ø 16 to 63 mm)
- can be installed with a light-weight anchor

Suggestion for use

 the use of plastic anchors is not recommended for permanent suspended loading applications

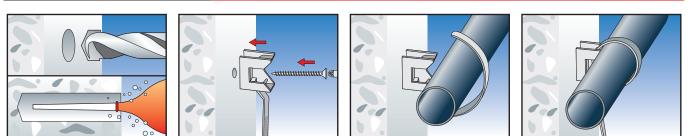

Clean the hole before the installation

product code and technical data

			TC nylon clip		$\mathbf{d_o}$ = hole diameter for screw				
Code	Description	d _o mm	A mm	B mm	C mm	D mm	Working temperature	Installation temperature	Resistance of the cable tie opening Kg
2400	TC for pipes Ø6 - Ø32	6	17.6	24.5	180	5.9	-40°C / +70°C	-5°C / +35°C	36
2401	TC for pipes Ø40 - Ø63	6	17.6	40.5	280	5.9	-40°C / +70°C	-5°C / +35°C	36

Examples of applications

