

# Vorpa WIRE ROPE CLIP

Fixing accessories

product code and technical data



Forged wire rope clip


Suitable for

- wire ropes
- cables
- tie rods
- ropes


To fix

- radio systems cables
- TV systems cables
- tie rods for orchards
- wire clotheslines
- tensioning cables


Examples of installation



Correct method of fitting Wire Rope Grips



Incorrect method of fitting Wire Rope Grips

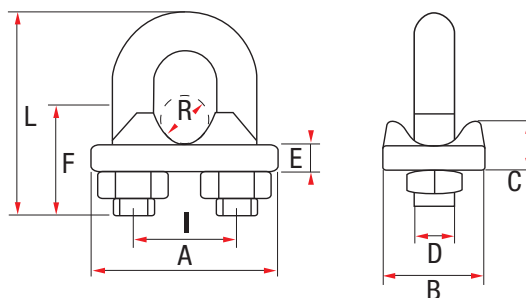

Code	Ø R mm	Ø R" "	A mm	B mm	C mm	D mm	E mm	F mm	I mm	L mm	S mm	T mm
1520	2-3	1/8	21	12	9	M4	5	12	9	20	1,25	3
1521	4-5	3/16	25	18	9	M5	5	14	11	25	2,46	3
1522	6	1/4	30	19	10	M6	6	19	15	33	4,24	4
1523	8	5/16	33	20	10,5	M6	6	22	16	35	4,24	4
1524	10	3/8	38	22	11	M8	6	22	19	43	10,2	4
*	11	7/16	40	22,5	13	M8	6	23	21	43	10,2	4
*	12	1/2	43	25	13	M10	6	30	23	55	20,11	5
*	14	9/16	46	27	17	M10	7,5	30	25	55	20,11	5
*	16	5/8	53	31	18	M10	8	32	28	63	20,11	5
*	18	11/16	59	33	20	M12	8	38	30	78	34,43	5
*	20	3/4	60	34	22	M12	9	38	33	78	34,43	5
*	22	7/8	64	34	23	M12	9,5	42	37	80	34,43	6
*	24-25	1	70	40	24	M12	10	46	40	88	34,43	6
*	26-28	1.1/8	80	43	30	M14	12	50	42	97	54,77	7
*	30-32	1.1/4	92	45	34	M16	14	70	49	130	85,14	8
*	36-38	1.1/2	95	51	39	M16	16	75	57	135	85,14	8
*	42-45	1.3/4	115	58	43	M20	16	83	70	158	167,2	10
*	48-50	2	116	59	46	M20	16	83	70	178	167,2	10

S = Torque (with 0,10 safety factor included)

T = Nr. clips to use

\* on request

Examples of applications

